
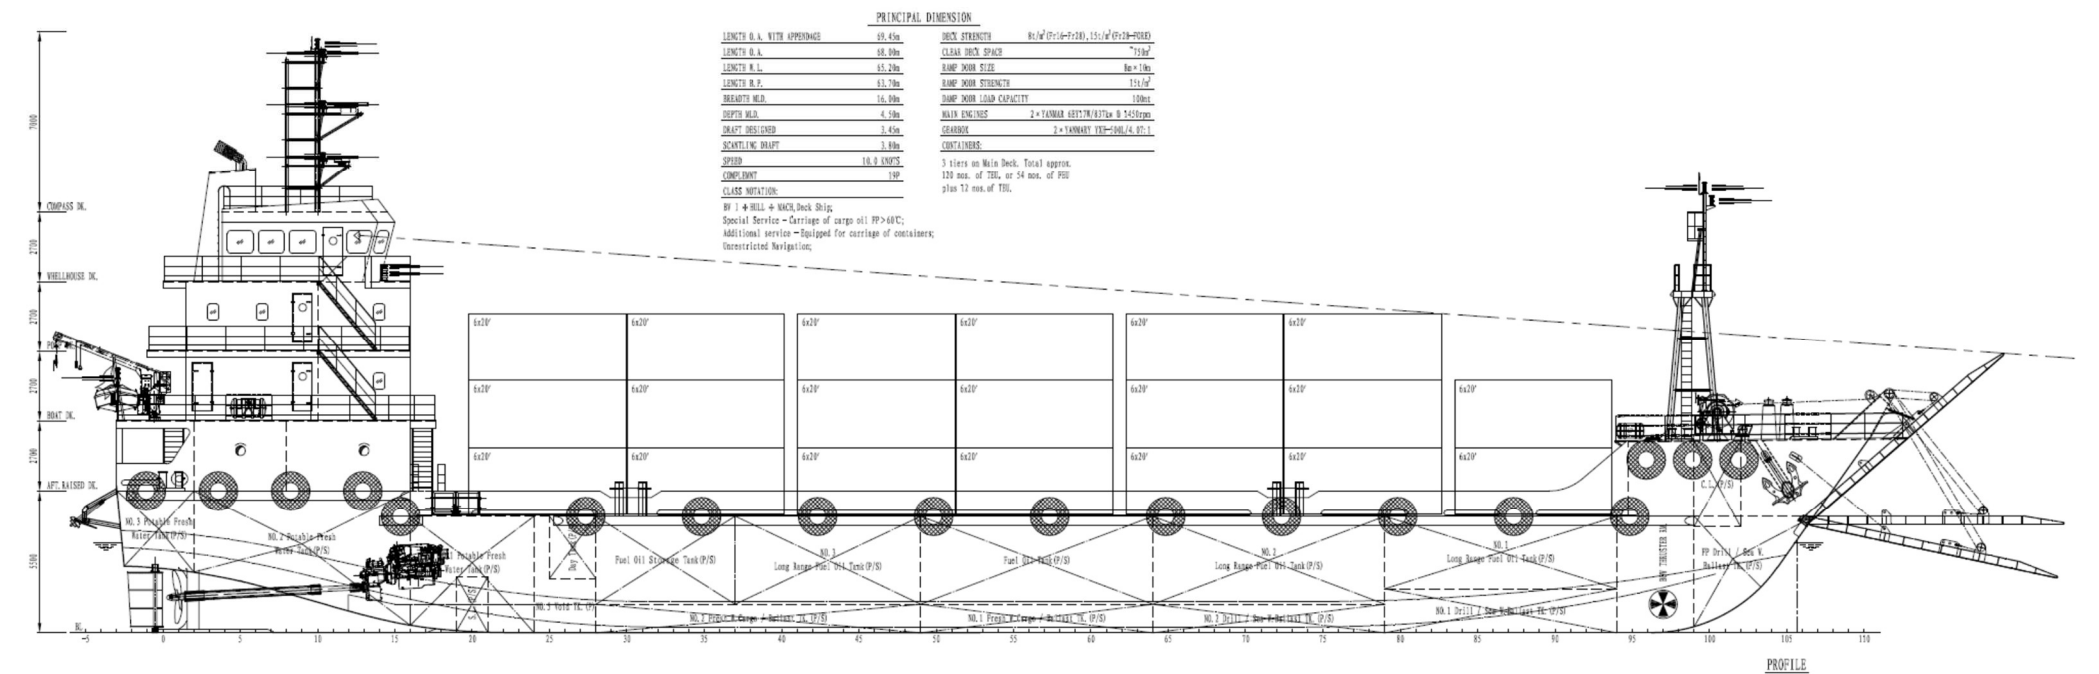
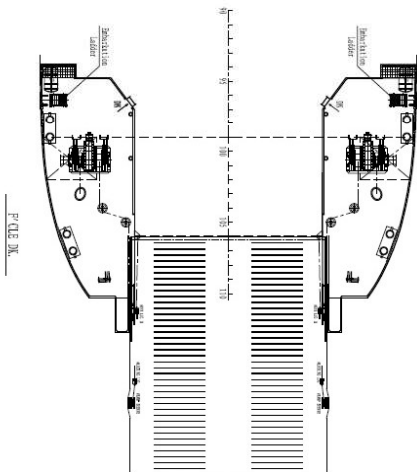
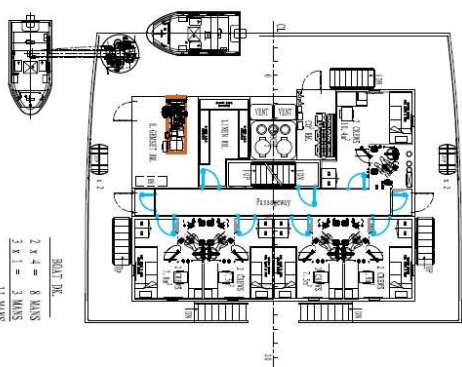
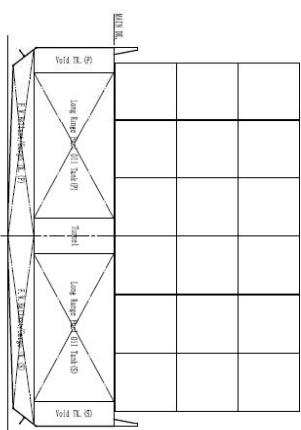
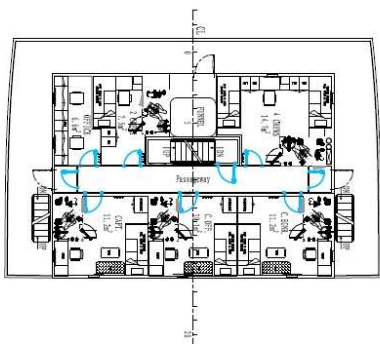

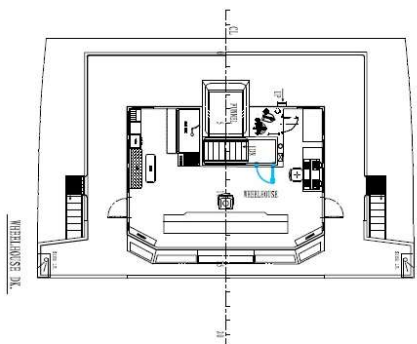
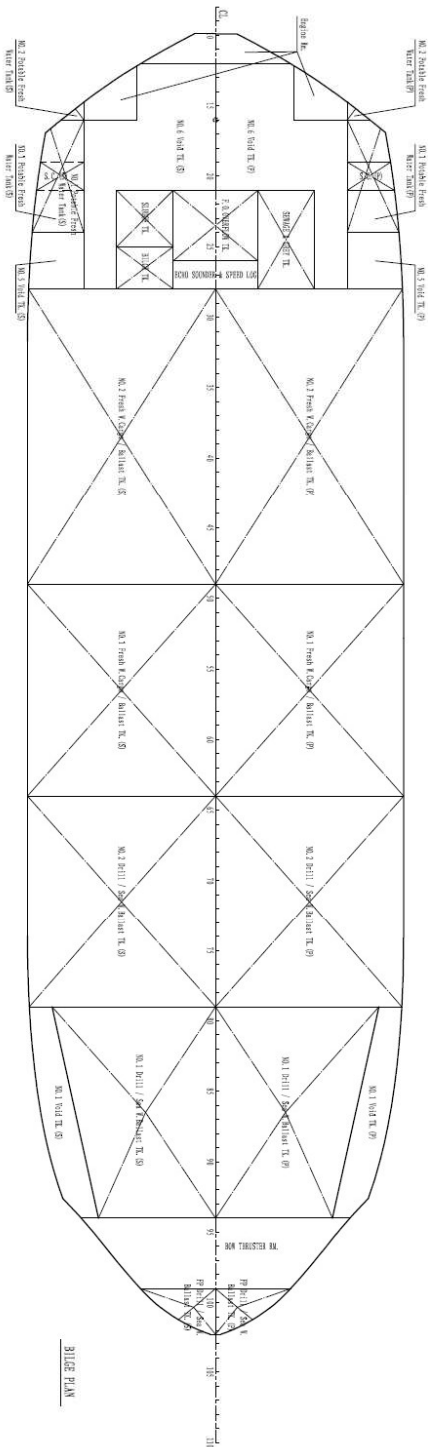
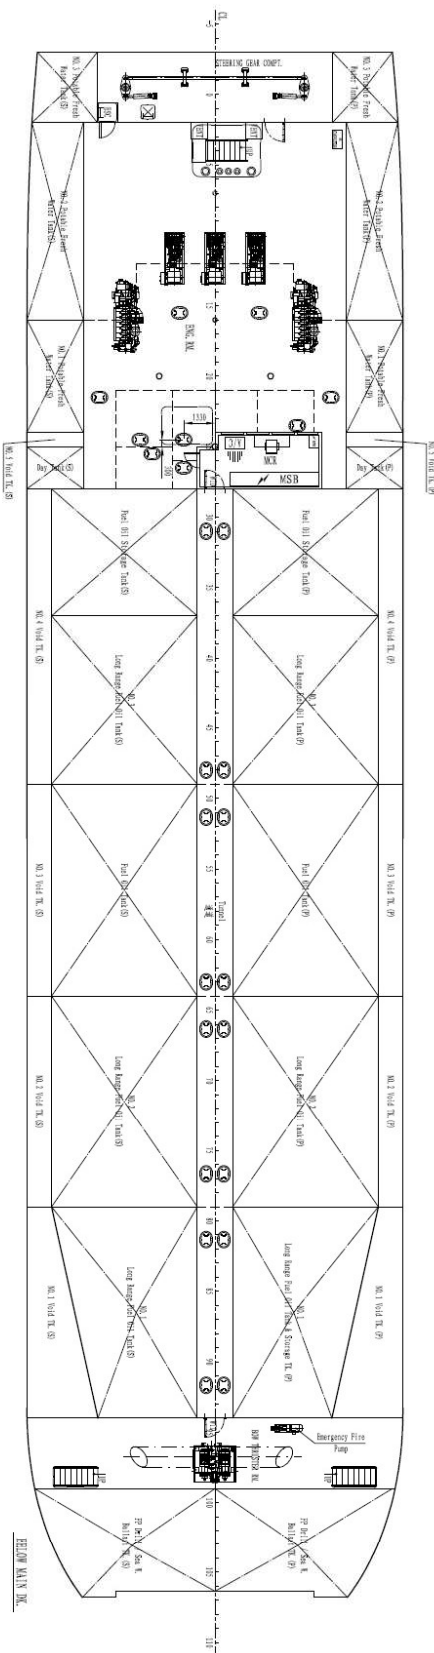
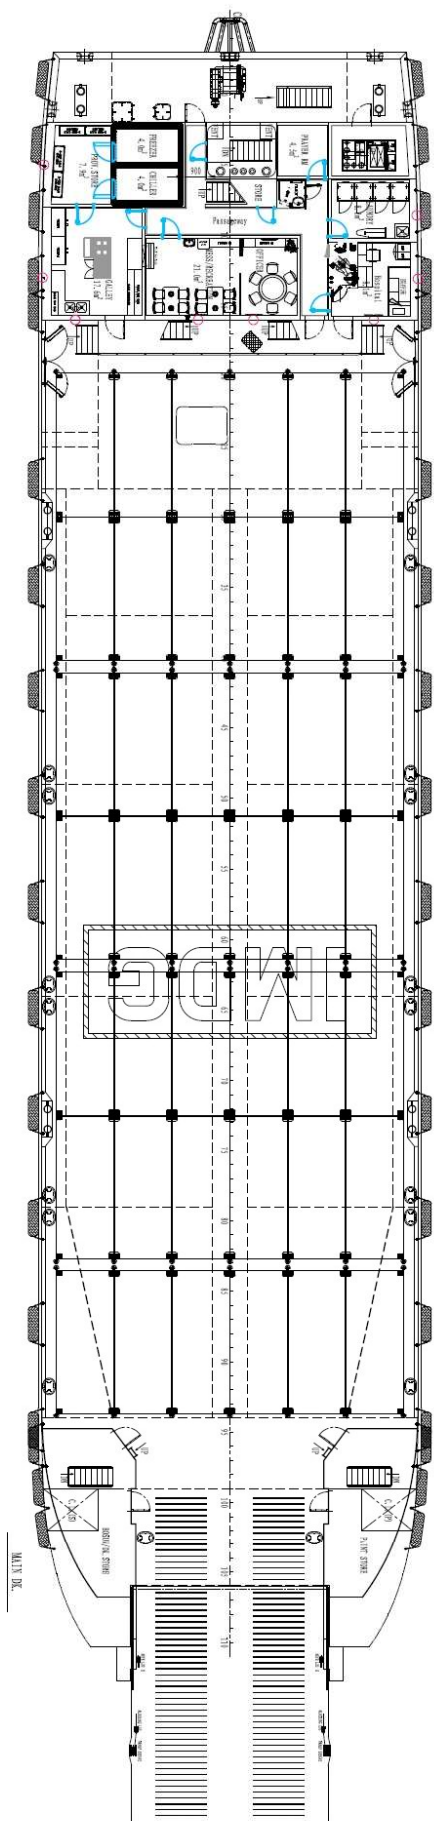


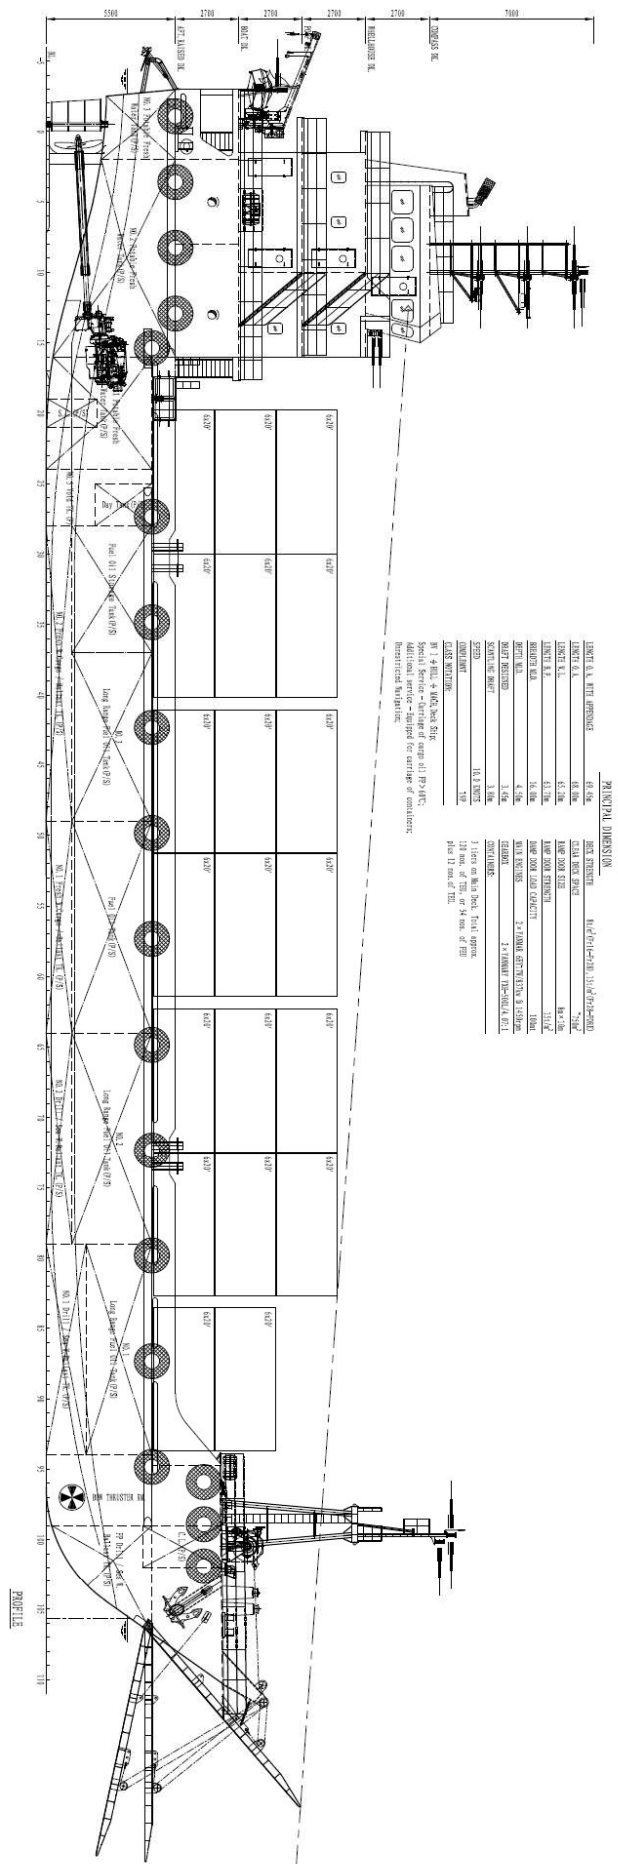

68M LANDING CRAFT

Class/Notation BV/I ✕Hull✕Mach, Deck Ship; Special Service-Carriage of Cargo Oil FP>60°C; Equipped for Carriage of Containers; Unrestricted Navigation

DIMENSIONS		RADIO & NAVIGATION EQUIPMENT	
Length OA	68.00m	GMDSS	Area 3
Length BP	63.70m	VHF/DSC Radio Tel	2 x Furuno FM8900S
Breadth Mld	16.00m	Radar	1 x Furuno FAR-1518
Depth Mld	4.50m (approx.)		1 x Garmin AQUAMAP 1222
Draft (Design)	3.45m (approx.)		1 x Furuno FE-800
GENERAL INFORMATION		Echo Sounder	1 x YDK CMZ900B
Built	2025	Gyro Compass	1 x Furuno FAX-30
GRT/NRT	>1000Tons/TBA	Weather Fax	1 x Furuno DS-85
Flag	Singapore	Speed Log	1 x Furuno NT888G MK2
IMO No.	1124425	Auto Pilot	1 x Furuno NX-700A
PERFORMANCE		Navytex Receiver	1 x Furuno GP-170
Free Running Speed	10 Knots (approx.)	GPS	1 x SART
Endurance	125 Days (approx.)	EPIRB	1 x SART
COMPLEMENT		Inmarsat-C	1 x SART
3 x 1-man cabin	3 men	AIS	1 x SART
6 x 2-men cabin	12 men	Iridium Statellite Tel	1 x SART
1 x 4-men cabin	4 men	BNWAS	1 x SART
Total	19 men	Magnetic Compass	1 x SART
PROPULSION SYSTEM		2-way VHF	3 x SART
Main Engines	2 x 837KW@1450RPM, Yanmar 6EY17W	MF/HF Radio Tel	1 x SART
Gearbox	Yanmar YXH-500L, ratio 4.07:1	Walkie-Talkie	3 x SART
Main Generators	3 x 110ekW, 415V/3ph/50Hz		
Emergency Generator	Dongfeng Cummins 6CTA8.3-GM155		
Bow Thruster	1 x 80ekW, 415V/3ph/50Hz		
Propellers	Dongfeng Cummins 6CTA-8.3-GM115		
Steering Gear	1 x 3 Ton (approx.), FPP		
Rudders	ThrustLeader TLCT80		
CAPACITIES			
Fresh Water	229m3 (approx.)		
Fuel Oil	615m3 (approx.)		
Long Range Fuel Oil	938m3 (approx.)		
Sewage Tank	9m3 (approx.)		
Ballast Tank	FW: 320m3 (approx.) SW: 398m3 (approx.)		
FO Overflow Tank	11m3 (approx.)		
Sewage Tank	9m3 (approx.)		
Sludge Tank	5.4m3 (approx.)		
Bilge Tank	3.9m3 (approx.)		
Free Deck Area	750m2 (approx.)		
Deck Cargo Weight	1250T (approx.)		
Deck Strength	8T/m2 (Fr 16-28)		
Ramp	Strength: 15T/m2 Door Size: L10m x W8m		
Containers	120 TEU or 54 FEU + 12 TEU		
DECK EQUIPMENT		PUMPS	
Anchors	2 x 1920 Kg (Bow), 1 x 1920kg (Stern)	Bilge & Ballast Pump	1 x 50m3/hr x 50m head
Anchor Chain	16 shackles of 38mm Dia		HC Machinery 80CLZ-6
Anchor Windlass	2 x 8T@15m/min, 36mm Dia, 200m SWR	Fuel Transfer Pump	2 x 12m3/hr x 30m head
			HC Machinery KCB200
		Fire/GS Pump	1 x 50m3/hr x 50m head
			HC Machinery 80CLZ-6
		Emergency Fire Pump	1 x 43m3/hr x 50m head
			HC Machinery 65CWY-60
		FW Cargo Pump	1 x 50m3/hr x 50m head
			HC Machinery 80CLZ-6
		Long Range FO Pump	2 x 100m3/hr x 70m head
			HC Machinery 2VM1400-75
		Emergency Bilge Pump	1 x 50m3/hr x 50m head
			HC Machinery 80CLZ-6
		AHU Cooling Pump	2 x 43m3/hr x 28m head
			HC Machinery 65CWZ-8
		Domestic FW Pump	1 x 3.5m3/hr X 28m head
			HC Machinery 1.5CWX-2A
		Domestic SW Pump	1 x 3.5m3/hr X 28m head
			HC Machinery 1.5CWX-2A
		Domestic FW/SW Standby Pump	1 x 3.5m3/hr X 28m head
			HC Machinery 1.5CWX-2A
MISCELLANEOUS			
Oily Water Separator	1 x 0.5m3/hr		
Sewage Treatment Plant	1 x 25 Persons		
Ballast Water Management System	1 x 50m3/hr		
Reefer Socket	16x 415V/3Ph/50Hz		
Rescue Boat & Davit	1 x 6 Persons, Inboard Diesel Engine		

[illegible]